

# MX43

- Analog and digital controller
- 4 or 8 lines /  
16 to 32 detectors max
- Highly versatile controller
- SIL1 reliability



## MX 43

### Controller presentation

The MX 43 is an analog and digital controller designed for the continuous measurement and control of the gases present in the atmosphere and for 4-20 mA or digital contact signal.

Large graphic display


Smart keys make  
embedded menus  
simple to use



Front panel  
LEDs allow  
a quick  
and basic  
overview of the  
installation.

MX 43 manages both digital lines and analog channels, and covers all needs for a wide variety of applications.

The MX 43 digital technology allows up to 32 detectors to be distributed on 8 lines for increased cost savings.

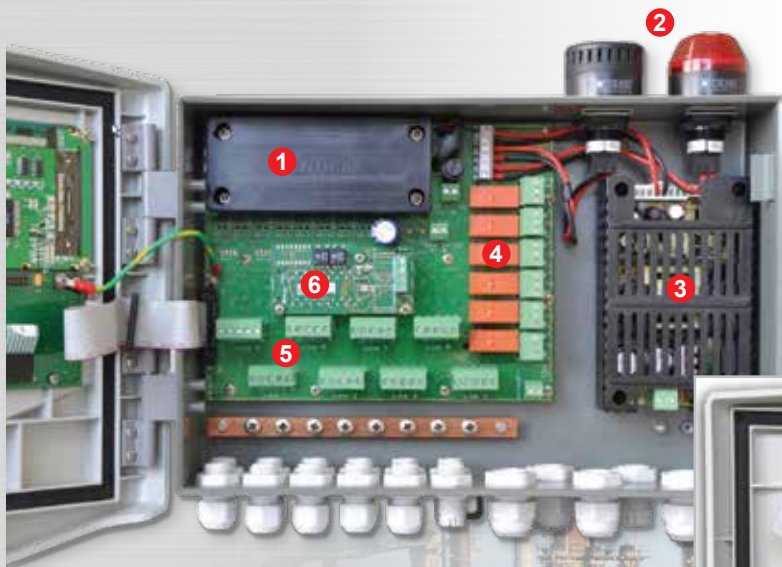


- 1 Back-up battery
- 2 Strobe and horn
- 3 Power supply
- 4 On-board relays
- 5 Removable terminals
- 6 RS485 output
- 7 USB datalogging kit






### Normal Mode

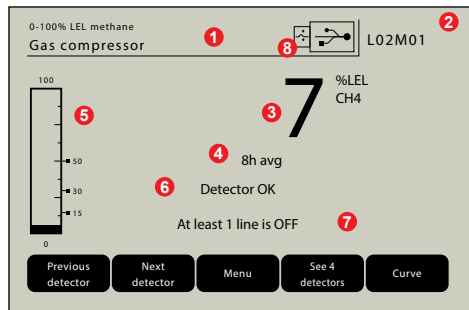

- 1 Measurement range, gas and detector tag
- 2 Detector address
- 3 Current value with unit and detected gas
- 4 Averaged value on the last 8 hours
- 5 Bar graph with alarm thresholds
- 6 Detector status (OK, OFF, fault)
- 7 MX 43 status information
- 8 Records on progress


### Calibration Curve

Simplified procedure that enables time savings (i.e. non-intrusive and one-man calibration).

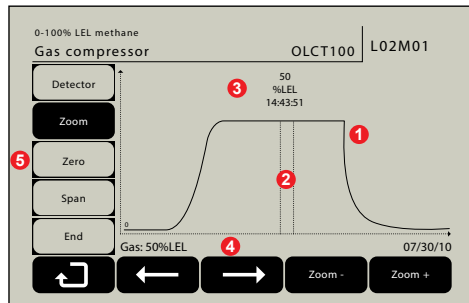

- 1 Calibration curve
- 2 Cursors for span settings
- 3 Measured value
- 4 Calibration gas value
- 5 Detector selection, zeroing and spanning


### Alarm mode

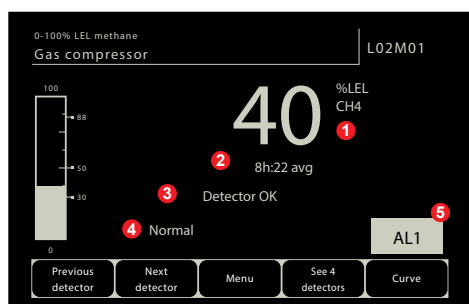

Reverse video in alarm conditions for immediate identification of the concerned detector.

- 1 Current value with unit and detected gas
- 2 Averaged value on the last 8 hours
- 3 Detector status (OK, OFF, fault)
- 4 MX 43 status information
- 5 Detector in alarm


### In 4-channel display

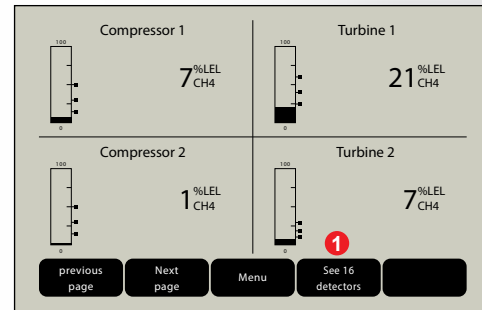

- 1 Up to 16 detectors can be displayed simultaneously

### Data-logging

By default, the MX 43 can store up to 512 alarm events, 512 fault events and 512 system events.

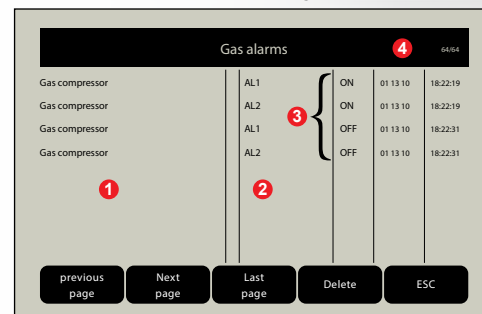


- 1 Detector tag
- 2 Event
- 3 Date and time of events appearance or clearance
- 4 Page number (up to 64 pages)



The USB option enables gas measurements to be saved at a sampling rate of 2 seconds to 15 minutes while events are saved when they happen.

The 4 Gb USB drive provides more than 2 years of storage in most of configurations. The USB option also delivers the ability to save and restore configuration and firmware files.

### COM 43 configuration software

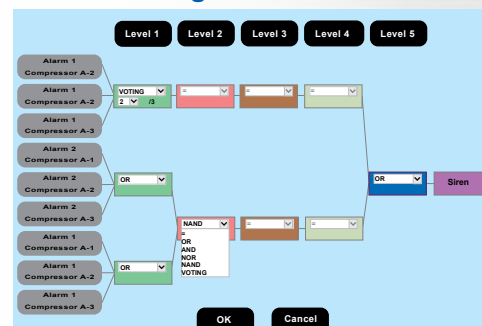

- 1 Simple relay programming
- 2 Up to 5 embedded functions: OR, AND, NOR, NAND, VOTING
- 3 Several timers available
- 4 Advanced management of audible alarms (acknowledgment, reactivation, evacuation)

### Modules

Different modules can be connected to the controller:

#### 4 or 8-relay module



4 or 8-programmable-relay module can be located closer to the actuators for cost savings.

#### 16-logic-input module



Addressable module of 16 logic input for recovery of digital information such as fire or intrusion alarms, emergency stop, limit switch activation, etc.

#### 8-analog-input module




This module enables standard analog transmitters (gas or flame detectors for instance) to be connected on a digital line for cost savings.

#### 4-analog-output module



Addressable 4- analog-output module which delivers 4 analog 4-20mA signal outputs (detector output copy, min, max, average of a group of detectors) for connection to a datalogger, a PLC, a Building Management System (BMS), etc.

### Configuration example

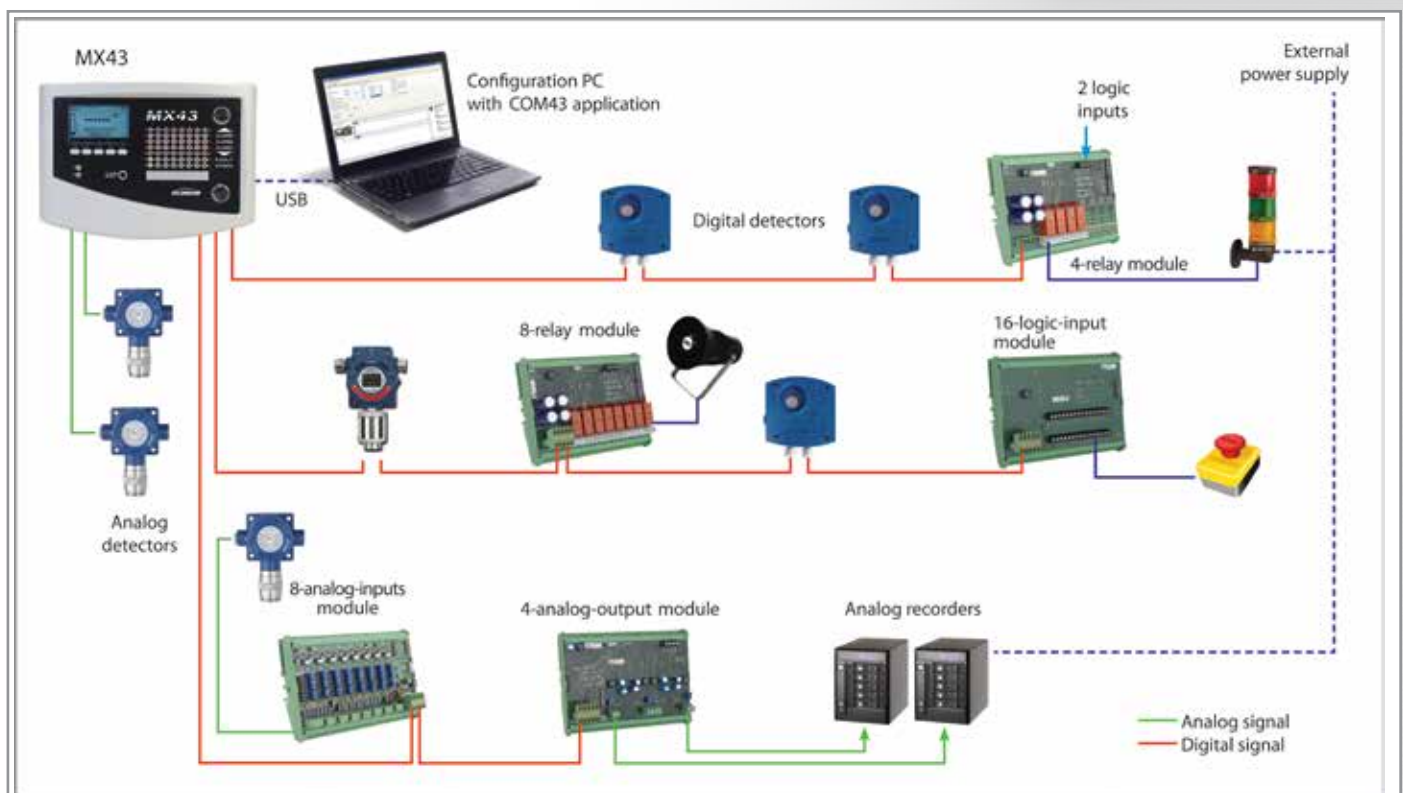

## SPECIFICATIONS

<b>Model</b>	<b>MX 43 gas detection control panel</b>
<b>Dimensions (wall-mounted version)</b>	370 x 299 x 109 mm (14.6 x 11.8 x 4.3 inches)
<b>Dimensions (rack)</b>	19", 4U ; 482.8 x 177 x 192.5 mm (19.1 x 7 x 7.6 inches)
<b>Ingress protection</b>	IP55 (wall-mounted), IP31 (rack)
<b>Cable entries (wall-mounted version)</b>	12 M16 cable glands, 4 to 8 mm <sup>2</sup> (8 to 11 AWG) outer diameter cable 6 M20 cable glands, 6 to 12 mm <sup>2</sup> (7 to 9 AWG) outer diameter cable
<b>Display</b>	LCD back-lit display + smart keys Display in video inverse in case of fault Customizable by user (display 1 to 16 channels simultaneously, fixed or scrolling, on events...) Bar graph with alarm threshold
<b>Visual indicators</b>	7 LEDs per line 1 LED fault indicator 1 LED fault indicator
<b>Buttons</b>	5 smart keys 1 audible alarm accept/reset button
<b>Operating use</b>	
<b>Operating temperature</b>	-20°C to +50°C
<b>Storage temperature</b>	-20°C to +50°C
<b>Humidity</b>	5 to 95% RH
<b>Power</b>	100-240 Vac 50-60 Hz or 21-28 Vdc, 112 W max
<b>Battery</b>	Embedded back up power supply in option (0.6 Ah)
<b>Consumption</b>	500 mA min (without module)
<b>Measurement lines</b>	
<b>Digital lines</b>	8 maximum RS-485 communication, proprietary protocol, 9600 Baud 2 twisted shielded-pair cable
<b>Analog channels</b>	8 maximum 0-23 mA analog signal input (4 to 20 mA reserved for measurement) 120 Ohm load resistance 2 or 3-core shielded cable
<b>Voltage (typical)</b>	21 to 28Vdc
<b>Maximum current output per line</b>	1.2 A (1.5 A intermittently)
<b>Maximum current output in total</b>	2.4 A permanent (3.2 A intermittently)
<b>Alarms</b>	
<b>Per channel</b>	5 alarm levels (A1, A2, A3, Overscale, Underscale) + Fault Non-ambiguity reading option for combustible gases monitoring
<b>Programmable thresholds</b>	On instantaneous or averaged values, rising or falling alarms, manual or automatic acknowledgement
<b>On-board relays</b>	5 fully programmable alarm relays 1 fault relay (non-configurable) Dry contact relay DPCO relays with contact rating of 250 Vca 2 A (inductive)
<b>Digital outputs</b>	RS-485 Modbus RTU serial link
<b>Approvals</b>	
<b>EMC</b>	According to EN50270
<b>ATEX</b>	EN50271 and metrological performances according to EN60079-29-1
<b>Low Voltage Directive</b>	According to EN61010
<b>CSA</b>	Pending
<b>Functional safety ( Reliability data )</b>	SIL1 capability according to EN50271:2010 $\lambda_{du}$ =2,29.10-6, PFDavg=1,03.10-2, Ti=1 year, MTBF=20 years, SFF 60% (data for 4 channel version, 24 Vdc powered)
<b>MED</b>	According to Marine Equipment Directive 96/98/EC. Fulfills the EMC requirements for installation in General Power Distribution Zone and/or Deck Zone.

## Our fixed detector range



OLCT 10



OLCT 10N



CTX 300



OLCT 100



iTrans 2



OLCT 80



OLCT 60



OLCT 60 / OLCT IR



OLCT IR



Spyglass



Flamevision

Distribuito da:  
**Zetalab s.r.l.** **Zetalab.it**

Via Umberto Giordano, 5 - 35132 Padova  
Tel 049 2021144 - Fax 049 2021143  
www.zetalab.it - email: info@zetalab.it



**OLDHAM**  
www.oldhamgas.com



**AMERICAS**  
Tel.: +1-713-559-9280  
Fax: +1-281-292-2860  
americas@oldhamgas.com

**EMEA**  
Tel.: +33-3-21-60-80-80  
Fax: +33-3-21-60-80-00  
info@oldhamgas.com

**ASIA PACIFIC**  
Tel.: +86 21 3127 6373  
Fax: +86 21 3127 6365  
sales@oldhamgas.com