


Product Information

Conductivity Meter LF9648



Dimensions

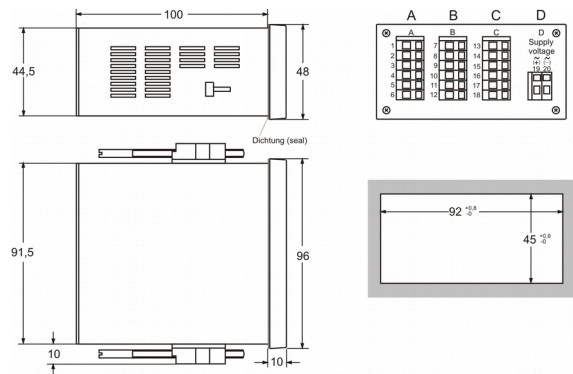

Characteristics


The Conductivity Meter LF9648 has been designed for the measurement of conductivity, as a degree of the purity or concentration of a liquid. In connection with 4-electrode-conductivity cells a high accuracy and insensitivity of contamination can be achieved. A further advantage is a broad range of application with only one cell. Only for measurement in ultra-pure water a special 2-electrode conductivity cell must be used.

Technical data

- Power supply**
Supply voltage : 230 V AC ±10 %; 115 V AC ±10 %;
24 V AC ±10 % or 24 V DC ±15 %
- Power consumption : max. 3.5 VA, 5 VA with analog output
- Operating temp. : -10...+55 °C
- CE-conformity : EN55022, EN60555, IEC61000-4-3/4/5/11/13
- Inputs**
MR conductivity : 0..2.000(0) µS/cm up to 0..2000 / 200(0) mS/cm (at 25 °C)
-Cell constant : 0.080..9.999
-Accuracy : 0.5 % of the measuring value, ±2 Digit
-Temperature comp. : non linear for ultra pure water and natural water or linear programmable from 0.000..9.999 %/K
- MR temperature : -50.0...+200.0 °C; Sensor Pt100 or Pt1000
-Accuracy : ±0.2 °C
- Display** : LED red, 14.2 mm
Indicating range : 2000(0) Digit with leading zero suppression
Parameter display : LED 2-digit red, 7 mm (parameter - and output indicator)
- Outputs**
Relay : SPDT < 250 V AC < 250 VA < 2 A, < 300 V DC < 50 W < 2 A
Transistor : transistor, <35 V AC/DC, max.100 mA, short circuit protected
- Analog output
Active : 0/4..20 mA burden ≤500 Ω; 0/2..10 V burden >500 Ω, isolated automatic burden changing (burden dependent)
Passive : 4..20 mA, ext. burden = RA[Ω] ≤ (supply - 5 V) ÷ 0.02 A; supply voltage 5..30 V DC,
- Accuracy : 0.1 %; TK 0.01 %/K
- Case** : panel mounting DIN 96x48 mm, material PA6-GF; UL94V-0
- Dimensions : front 96x48 mm, mounting depth 100 mm,
Weight : max. 390 g
Connection : clamp terminals, 0.08..1.5 mm², AWG28..AWG14

Connection diagram

Terminal strip A



Ordering code

LF9648 - 1. - 2. - 3. - 4. - 5. - 6. - 7.

1. Terminal strip A	
1	input for 2- or 4-electrode-cells, temperature compensation via Pt100
3	as 1, but temperature compensation via Pt1000
2. Terminal strip B	
00	not installed
2R	2 relay outputs
2T	2 electronic outputs
3. Terminal strip C	
00	not installed
2R	2 relay outputs
2T	2 electronic outputs
AO	analog output 0/4..20 mA, 0/2..10 V DC
2A	2 analog outputs 4..20 mA passive
4. Terminal strip D Supply voltage	
0	230 V AC ±10 % 50-60Hz
1	115 V AC ±10 % 50-60Hz
4	24 V AC ±10 % 50-60Hz
5	24 V DC ±15 %
5. Options	
00	without option
01	min- and max-peak hold
14	measuring/monitoring acc. to USP<645>
6. Unit appears on the unit field	
7. Additional text above the display (3x90 mm HxW)	

Connection diagram for terminal strip B-D see page Fehler:
Referenz nicht gefunden