

## ZL300 High Quality Colorimeter

- Humanity Design and Convenient Operation
- Stable Measurement Performance
- Convenient and Fast Locating
- PC Software—More Function Expansion
- Equipped with High Capacity Li-ion Battery



ZL300 colorimeter, easy to use and cost-effective, widely used in R&D, quality control and production management department, can measure color difference accurately and quickly. ZL300 colorimeter is equipped with quality control management software which can connect the computer to realize more functions.

## ZL Series High Quality Colorimeter

Color So Rich in Beauty



# ZL300 High Quality Colorimeter

## 1. Leading Humanity Design and Convenient Operation

- One-Touch Access to Measurement Interface
- Structure Design in line with Ergonomics
- Easy-to-use Operator Interface

## 2. Stable Measurement Performance

- The average fluctuation of  $\Delta E$  is less than 0.07, actually more in 0.04~0.06.
- Portable structure design is more conducive to keeping the instrument stable when using.

## 3. Flexible and Accurate Locating

- Illumination locating is a fast, simple and convenient locating

## 4. PC Software—Realize More Function Expansion


- ZL has the intellectual property of PC software. The corresponding software serial number and password protection are configured in ZL colorimeter.
- Be able to perform color difference analysis, color difference cumulative analysis, chromaticity index, color sample database management, simulating object color, etc.

## 5. Advanced Power Management Design

- ZL is the first enterprise using high capacity Li-ion battery in colorimeter.
- ZL Li-ion battery can be repeatedly charged which will save cost. Meanwhile, it can measure more than 3000 times on one charge to ensure the stability of long time measurement.

### $\Delta E$ Total Color Aberration

$\Delta L$  is large stands for the color is partial white.  
 $\Delta L$  is small stands for the color is partial black.  
 $\Delta a$  is large stands for the color is partial red.  
 $\Delta a$  is small stands for the color is partial green.  
 $\Delta b$  is large stands for the color is partial yellow.  
 $\Delta b$  is small stands for the color is partial blue.

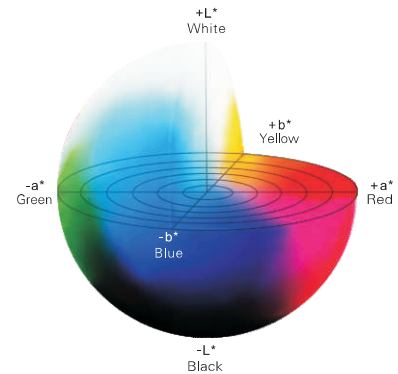

## Applicable Industries



## Technical Specifications

Illuminating/Viewing Geometry : 8/d

Measuring Aperture :  $\Phi 8\text{mm}$

Detector : Silicon photoelectric diode

Color Space : CIEL\*a\*b\*C\*h\* CIEL\*a\*b\* CIEXYZ

Color Difference Formula :  $\Delta E^*_{ab}$   $\Delta L^*_{a^*b^*}$   $\Delta E^*_{C^*h^*}$

Light Source : D65

Light Source Device : LED blue light excitation

Errors Between Each Equipment :  $\leq 0.40 \Delta E^*_{ab}$

Storage : 100pcs standards 20000pcs samples

Repeatability : Standard deviation within  $\Delta E^*_{ab}$  0.07 Average of 30 measurements of standard white plate

Weight : 500g

Dimension : 205 × 70 × 100 mm

Power source : Rechargeable lithium-ion battery 3.7V@3200mAh

Lamp Life : 5 years, more than 1.6 million measurements

## Distribuito da:

Zetalab s.r.l.

Via Castelfidardo, 11 - 35141 Padova

Telefono 049 2021144 - Fax 049 2021143

Internet: [www.zetalab.it](http://www.zetalab.it) - e-mail: [info@zetalab.it](mailto:info@zetalab.it)