



Stepless measurement of viscosities

/// The IKA workflow - now including viscosity measurement

You have been manufacturing, stirring and shaking with IKA laboratory devices for a long time. Thanks to the new ROTAVISC series, you can now process your samples with the proven IKA laboratory device structure right up to the viscosity measurement stage. And we're taking a significant step forward here: With the four ROTAVISC models, you measure steplessly from 0,01 to 200 rotations per minute. There's no need to get used to something new. We'll install your new viscometer exactly where you want it. In addition, the measuring process is intuitive, standardized and complies with the familiar IKA menu structure for laboratory devices.

Simply switch it on and start measuring!

10 YEARS
WARRANTY*



Innovative Viscometer Portfolio

Four devices for four viscosity ranges - but a single, huge functional scope for all: IKA ROTAVISC lo-vi, me-vi, hi-vi I, and hi-vi II precisely and reliably determine the flow curves of your fluids.

Personalized Application Advice

You can test all of the viscometers yourself at the IKA Application Center. Our experts will analyze your measuring processes and work with you to find out how best to determine the viscosity of your samples.

Worldwide Service

To opt for an IKA viscometer is also to opt for the excellent IKA technical service in your region. Our team is available worldwide for your service and application needs. Spare parts for your viscometer are guaranteed for 10 years.

10 years
warranty*



*2+8 years after registering at
www.ika.com/register,
wearing parts excluded

Distribuito da:
Zetalab s.r.l.

Via Umberto Giordano, 5 - 35132 Padova
Tel 049 2021144 - Fax 049 2021143
www.zetalab.it - email: info@zetalab.it

Zetalab.it



IKA ROTAVISC

/// with the largest range of functions in its class

The new ROTAVISC series determines the liquid viscosity in all areas of application ranging from the laboratory to quality control. The four devices measure in different viscosity ranges. Regardless of a simple or demanding viscosity measurement – the ROTAVISC delivers rapid and accurate results. The scope of delivery includes an ISO standard spindle set, a protective bracket, temperature sensor, quick connector, hook connector and ROTASTAND stand.

- ① mPas
- ② M%
- ③ rpm
- ④ PR
- ⑤ Pa
- ⑥ 1/s
- ⑦ °C / °F
- ⑧ g/cm³



Features

Parameters / Display

The display shows the following parameters:


- ① Viscosity ② torque ③ rotational speed
- ④ program status ⑤ shear stress ⑥ shear rate ⑦ temperature
- ⑧ density

Temperature sensor

The temperature sensor is always included in the scope of delivery, because it is recommended to measure the viscosity in relation to a temperature value.

Temperature control

By using suitable accessories it is possible to measure samples from -100 °C to 300 °C.

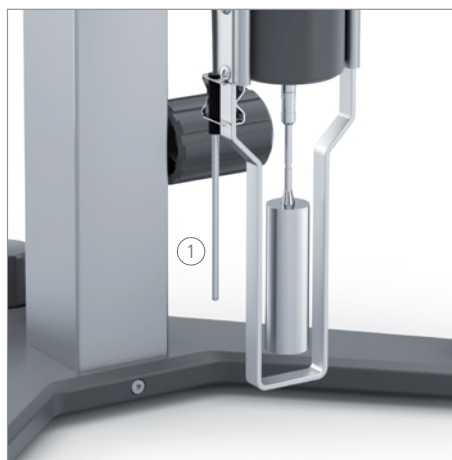

Stepless positioning

The ROTASTAND ensures perpendicular stability. The height of the viscometer can be adjusted steplessly.

Multiple mountings

Thread adaption, quick connector or hook connector: You attach the spindle to the device in the way that you find most convenient.






3 measuring modes

Three measuring modes are available for different applications: accurate, balance and fast.

Different programs

Ten different programs and ramps can be stored.

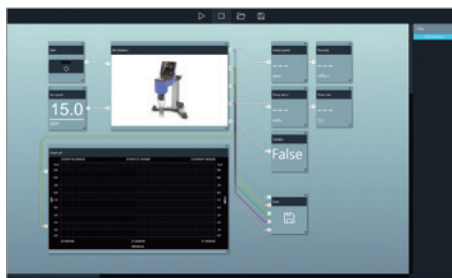

Functions

The starting and stopping of a measurement can be defined individually: With a timer, once a certain torque has been achieved, or once the viscosity has been measured. Labworldsoft® enables any number of program and data recordings.



Interfaces

There are connection possibilities for USB and RS 232 available. This means that control via a PC and data capture are possible.

Spindles

Four respectively six ISO spindles are included in the scope of delivery.

Viscosity measurement as usual. But better.



OPERATE THE DEVICE INTUITIVELY ON THE 4,3" TFT DISPLAY.

The large color display offers multilingual menu guidance that is as intuitive as for all other IKA devices.

YOUR ADVANTAGE: The tried-and-tested IKA laboratory device structure is now available for your viscometer too.

PRECISE RESULTS FROM 0,01 – 200 RPM

The precision lies at $\pm 1\%$ of the maximum value of the measurement range. The reproducibility is $\pm 0,2\%$.

YOUR ADVANTAGE: You get results of highest accuracy.

TAKE STEPLESS MEASUREMENTS

The rotation rate can be set steplessly over the entire measurement range. This allows the stepless programming of a flow curve.

YOUR ADVANTAGE: The only seamless viscosity measurement offered by entry-level viscometers.

EASY SET UP

Delivered in a practical transport case: The viscometer is secured to the ROTASTAND in no time at all.

YOUR ADVANTAGE: Immediately ready to use - even in different locations.

ALIGN THE DEVICE WITH THE DIGITAL LEVEL

After switching on the device, you are prompted to align it using the digital level.

YOUR ADVANTAGE: Process safety - you cannot forget to adjust the level.

INSERT THE SPINDLE

Insert the ISO spindle in the way that's most convenient to you: With thread adaption, quick connector or hook connector.

YOUR ADVANTAGE: The device adapts itself to suit your working habits.

CHOOSE ONE OF FOUR OUTPUT FORMATS

From a simple scale to a complex depiction of the viscosity profile over the entire stepless rotation range: All ROTAVISC models combine different output formats.

YOUR ADVANTAGE: Only a single device per viscosity range that can deliver all output formats.





FOUR DEVICES. FOUR MEASURING RANGES.

lo-vi viscosity measuring range:
1 – 6 000 000 mPas

me-vi viscosity measuring range:
100 – 40 000 000 mPas

hi-vi I viscosity measuring range:
200 – 80 000 000 mPas

hi-vi II viscosity measuring range:
800 – 320 000 000 mPas



Your laboratory, our package

What kind of laboratory do you have? With us, you are sure to find the right package for viscosity measurement.

What do you need? Come and talk to us!

IKA ROTAVISC Complete

The scope of delivery includes:

① ROTASTAND stand ② standard spindle set
③ temperature sensor ④ protective bracket ⑤ hook connector as well as ⑥ quick connector.

[IKA ROTAVISC lo-vi Complete](#) | Ident No.: 0025000310

[IKA ROTAVISC me-vi Complete](#) | Ident No.: 0025000311

[IKA ROTAVISC hi-vi I Complete](#) | Ident No.: 0025000312

[IKA ROTAVISC hi-vi II Complete](#) | Ident No.: 0025000313

Technical data

TECHNICAL DATA

Viscosity accuracy	1 %
Viscosity repeatability	0,2 %
Display	TFT
Motor rating output	4,8 W
Working temperature	min.: -100 °C max.: +300 °C
Speed	0,01 – 200 rpm
Setting accuracy speed	0,01 rpm
Temperature measurement resolution	0,1 K
Connection for ext. temperature sensor	PT 100
Graph function	Yes
Calibration option (temperature)	Yes
Overload protection	Yes
Operating mode	Timer and continuous operation
Attachment on stand	Extension arm
Interfaces	USB, RS 232, Analog output

GENERAL DATA

Weight	7,1 kg
Dimensions (W x H x D)	351 x 629 x 372 mm
Permissible ambient temperature	5 – 40 °C
Permissible relative humidity	50 %
Voltage	100 – 240 V
Frequency	50 / 60 Hz
Power input	24 W, Standby: 0,06 W
Protection class according to DIN EN 60529	IP 40

FOUR DEVICES. FOUR MEASURING RANGES.

ROTAVISC lo-vi

Viscosity measuring range	1 – 6 000 000 mPas
---------------------------	--------------------

ROTAVISC me-vi

Viscosity measuring range	100 – 40 000 000 mPas
---------------------------	-----------------------

ROTAVISC hi-vi I

Viscosity measuring range	200 – 80 000 000 mPas
---------------------------	-----------------------

ROTAVISC hi-vi II

Viscosity measuring range	800 – 320 000 000 mPas
---------------------------	------------------------

HRC 2 refrigerated and heating circulator



HRC 2 basic
Ident No.: 0025003742
HRC 2 control
Ident No.: 0025004524

Precise tempering to prepare your samples: The compact refrigerated and heating circulator HRC 2 control is renowned for its high energy efficiency, a working temperature range from -30 °C to 100 °C and a powerful and infinitely variable pressure and suction pump. The on-demand and speed-controlled compressor reduces noise and operating costs.

The HRC 2 control in combination with an external temperature sensor is perfectly suitable to precisely temper external closed or open applications.

The high-quality isolation of the 4 l bath allows fast heating and reduces heat input when cooling.

Using the external temperature control circuit is possible for up to 2,5 l thermofluid without a refill. The integrated hopper and drain valve ensure a safe and clean handling of the thermofluid. The easy-to-open front flap allows an easy cleaning of the cooling unit's air filter. There is a drain valve on the front side of the bath. A hose can be connected to empty the bath, so the user does not get in direct contact with the thermofluid.

STARVISC 200-2.5 control measuring stirrer



Display viscosity even during product development: the new IKA STARVISC 200-2.5 control measuring stirrer makes it possible. The result can be read in real-time on the display. STARVISC therefore has a broad range of applications. This is particularly helpful during product development: STARVISC already clearly indicates while running research programmes as to whether the stirred substance can be used as desired.

- > High-precision measurement
- > User-friendly menu for immediate viscosity calculation
- > Removable control unit
- > Powerful stirrer

STARVISC 200-2.5 control
Ident No.: 0025003604

Accessories



DINS-1 DIN adapter

Adapter to measure the viscosity according to DIN 53019. The set includes a double jacket to quickly heat up or cool down the sample as well as a coaxial cylinder system for the analysis of the sample at a specific shear rate.

Ident No.: 0025000387



ELVAS-1 adapter

Adapter to measure very low viscosities, which are not measured by the standard spindle. A double jacket with temperature sensor to quickly heat up or cool down the sample as well as a coaxial cylinder system for the analysis of the sample at a specific shear rate is included.

Ident No.: 0025000390



VOLS-1 adapter

Adapter to measure the viscosity of especially valuable and expensive samples. A double jacket with temperature sensor to quickly heat up or cool down the sample as well as a coaxial cylinder system for the analysis of the sample at a specific shear rate is included. Further spindles and chambers for different volumes can be purchased separately.

Ident No.: 0025000352



VAN-1 vane spindle set

The vane spindle set allows the viscosity measurement of suspensions. Four vane spindles are included in the delivery.

Ident No.: 0025000407



SAS-1 spiral adapter

Spiral adapter to measure the viscosity of very sticky and other viscous samples. Additionally, it is possible to analyse the fluid behavior of different shear rates.

Ident No.: 0025000377



labworldsoft® 6 Starter

Laboratory software for small configurations. Up to three devices of the device library can be controlled simultaneously.

Ident No.: 0020019397



labworldsoft® 6 Pro

Laboratory software for all configurations. With the Pro version you have limitless access to the device library and can control any number of devices simultaneously.

Ident No.: 0020017366

Accessories



CAL-O-5 standard silicon oil
5 mPas
Ident No.: 0025000397



CAL-O-10 standard silicon oil
10 mPas
Ident No.: 0025000398



CAL-O-50 standard silicon oil
50 mPas
Ident No.: 0025000399

Standard silicon oil

With the certified standard silicon oil you are able to check the measurement accuracy of your ROTAVISC. The certificate is part of the delivery. Standard silicon oils with different viscosities or temperature conditions can be ordered customer-specifically.



CAL-O-100 standard silicon oil
100 mPas
Ident No.: 0025000434



CAL-O-500 standard silicon oil
500 mPas
Ident No.: 0025000435



CAL-O-1000 standard silicon oil
1000 mPas
Ident No.: 0025000436



CAL-O-5000 standard silicon oil
5000 mPas
Ident No.: 0025000437



CAL-O-12500 standard silicon oil
12 500 mPas
Ident No.: 0025000466



CAL-O-30000 standard silicon oil
30 000 mPas
Ident No.: 0025000467




CAL-O-60000 standard silicon oil
60 000 mPas
Ident No.: 0025000468



CAL-O-100000 standard silicon oil
100 000 mPas
Ident No.: 0025000469

Good to know

Infinitely variable measurement according to the SEARLE principle

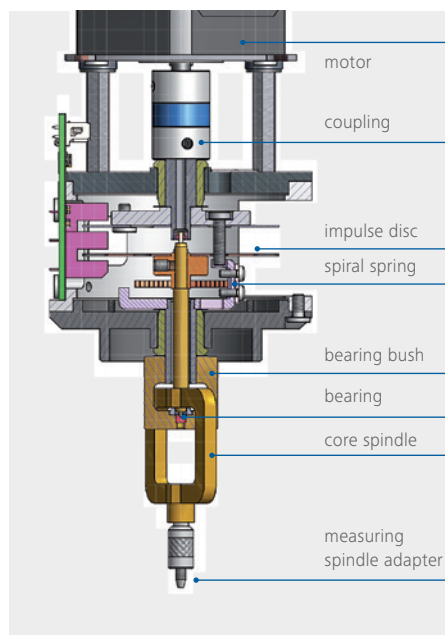

The ROTAVISC measurement of viscosity is based on the SEARLE principle. A measuring spindle rotates in the substance being examined. The viscosity of the sample is determined from the torque required to achieve a given speed, taking into account the spindle used. All this happens automatically without users having to make manual adjustments to the settings.

The viscosity of a substance is often not a constant factor; it depends on the temperature, pressure and other influences. Therefore, different viscosity values will be recorded for the same substance at different shear rates and temperatures, for instance.

Usability



Using the appropriate accessories, any fluid sample, even down to the low-viscosity range, can be measured properly and reproducibly. This also applies to making relative comparisons. It is also possible to adapt the device to user-specific measuring containers, so that decanting the sample - and thus possibly changing the sample structure - is not required.

Due to the extensive range of measuring geometries, ROTAVISC is suitable for all common measuring requirements and all conceivable free-flowing media. Measurement results can be provided in both relative and absolute terms. The extensive range of accessories and an intuitive user interface ensure that ROTAVISC is fully usable. The necessary parameters can be set in no time, meaning that the staff responsible for the rheological measurements hardly require any training.

Good to know

Technical features

Measurements according to DIN 53019, ASTM 2555 and relative measurements are possible with the ROTAVISC and the corresponding measuring spindles. ROTAVISC detects the sample temperature, which is important for the viscosity measurement, from a PT 100 sensor that can be immersed in the substance. You can store measurement methods and automate processes without even connecting to a computer. This makes it possible to define both step and ramp programs, which can then be standardized over and over again. The results displayed on the device as a graph.

Temperature control

The viscosity of a sample is always dependent on its temperature. Therefore, the sample should always be measured isothermally. The IKA tempering equipment meets this requirement by using immersion circulators as well as cryostats for temperatures ranging from -30 °C to 250 °C.

This widens ROTAVISC's field of application, since the IKA laboratory software (see above) for controlling the thermostats can be used to specify rheological temperature ramps and record the change in viscosity.

Verification / calibration

The ISO 17025 standard requires that measuring instruments be verified. ROTAVISC offers users the option of carrying out this verification themselves. Thanks to the extensive range of appropriate standard fluids, users are fully autonomous, i.e. able to check their device without external maintenance costs. This allows them to check whether all specified readings are within the specified measurement accuracy range.

