

# USB Sound Level Datalogger




**High accuracy datalogging of up to 129,920 records**

*Designed to meet ANSI and IEC 61672 Class 2 standards*

## Features:

- USB interface for easy setup and data download
- 30 to 130dB range
- Datalogging capability up to 129,920 records
- Selectable data sampling rate
- Records readings with real time clock
- Two start methods: programmed (from PC) or manual
- 0.5" electret microphone
- Includes 3.6V Lithium battery, Windows<sup>®</sup> compatible software, USB cover, tripod, USB extension cable, and windscreen

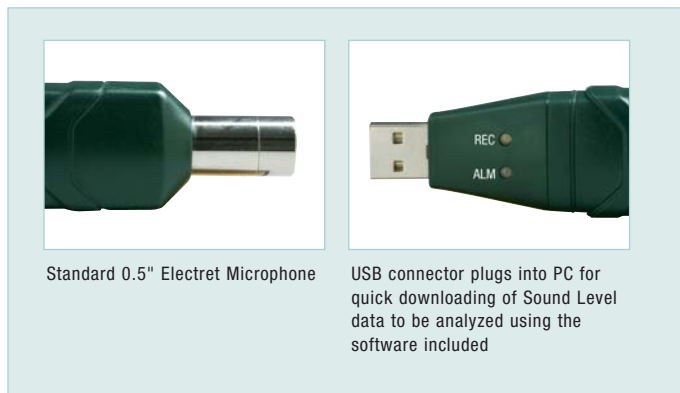

Standard 0.5" Electret Microphone

USB connector plugs into PC for quick downloading of Sound Level data to be analyzed using the software included



Distribuito da:  
**Zetalab s.r.l.** [Zetalab.it](http://Zetalab.it)

Via Umberto Giordano, 5 - 35132 Padova  
Tel 049 2021144 - Fax 049 2021143  
[www.zetalab.it](http://www.zetalab.it) - email: [info@zetalab.it](mailto:info@zetalab.it)

## Ordering Information:

- 407760 .....USB Sound Level Datalogger  
407760-NISTL ...USB Sound Level Datalogger with NIST Certificate (single point)  
42299 .....3.6V Lithium Battery (pkg of 2)

Specifications	
Range	30 to 130dB
Frequency Range	31.5 to 8kHz
Basic accuracy	±1.4dB
Weighting	A and C
Response Time	Fast (125ms)/Slow (1s)
Datalogging	129,920 points
PC Interface	USB
Dimensions	5.1 x 1.1 x 0.9" (130 x 30 x 25mm)
Weight	1oz (20g)

